


MAR501 series

PRESSURE REGULATOR



Option: **MP41**

Symbol



Specification

Model	MAR501	
Bore No.	20A	25A
Port size	3/4	1
Medium	Air	
Max. operating pressure	1.5 MPa	
Proof pressure	2 MPa	
Regulated pressure range	0.05~0.85 MPa	
Repeatability	±7% F.S.	
Ambient temperature	- 5~+60°C (No freezing)	
Attachment	Pressure gauge(PG-20),L-type bracket	
Weight	1460 g	

Order example

MAR501 – 20A – □ – E1 – □

MODEL PORT SIZE
20A: 3/4
25A: 1



(Option)
PRESSURE SWITCH
E1: MP41P-022
E2: MP41P-022-QD
E5: MP41P-042
E6: MP41P-042-QD

PORT THREAD
Blank: Rc thread
G: G thread
NPT: NPT thread



Blank: Standard type (PG-20)
C: External pressure gauge (PG-40) + Gauge adapter set (A-MAR302)
A: Gauge adapter set (A-MAR302)
J: Panel nuts

* PG-40 (C) and MP41 (E*) can not be selected at the same time.
* Refer to page 5-11 for the option of digital pressure switch MP41 (E*).

Pressure characteristics

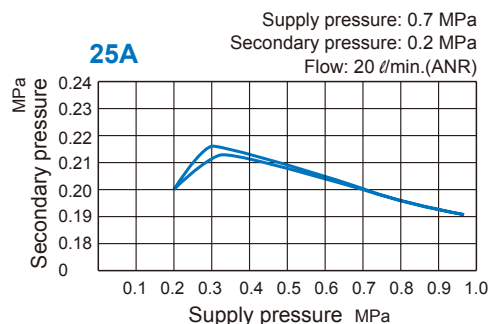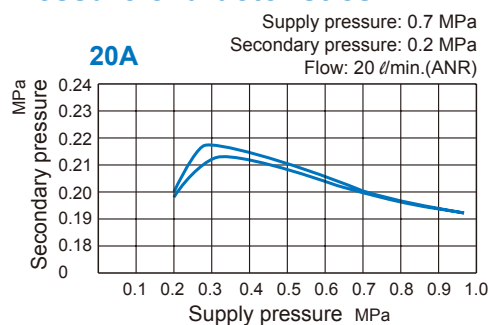

Flow feature

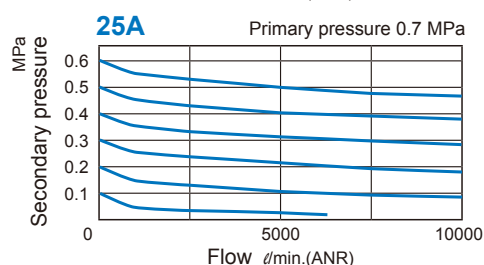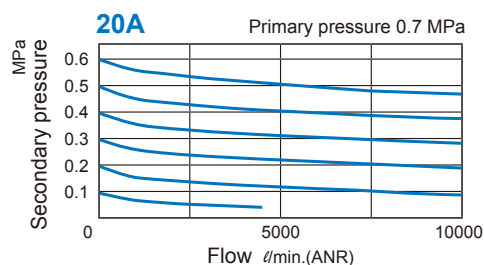

Accessories

Panel mounting hole

